
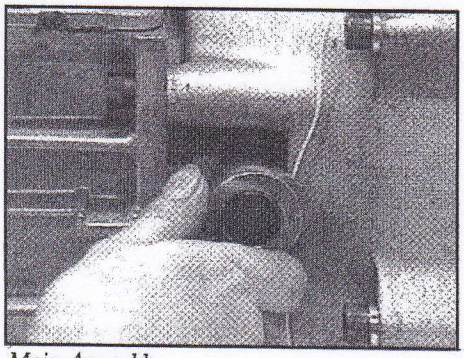



Main Assembly

...and tighten.

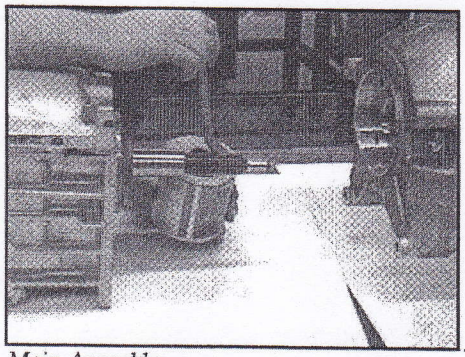


Main Assembly

Apply copper grease to the gearbox, input shaft spline and nose....

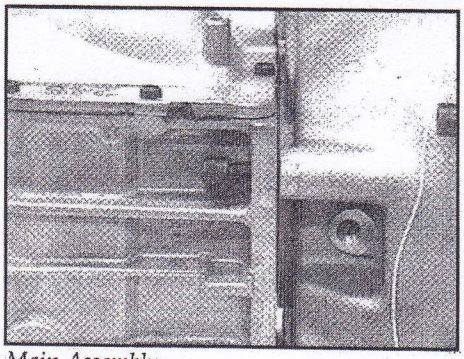

Main Assembly

...and fit the gearbox. Using caphead bolts and washers.

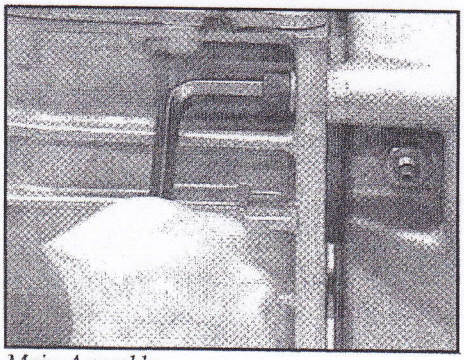

Main Assembly

Tighten to 50 ft lbs.