
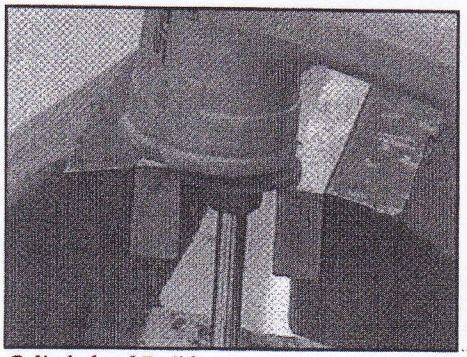



Cylinderhead Build

Assemble valves and tap sharply with a soft mallet to seat collets.

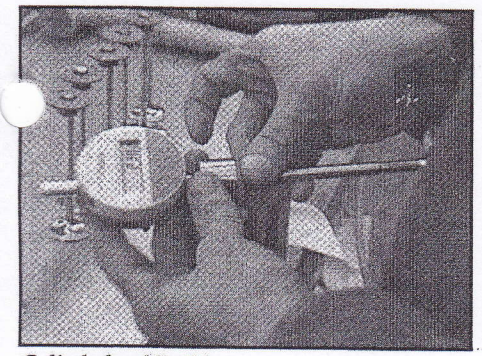


Cylinderhead Build

(STEP 1)
After zeroing a DTI gauge, measure from valve to valve cap surface. (as in situ.)
Once all valves are measured,remove cap and collets and keep in order.

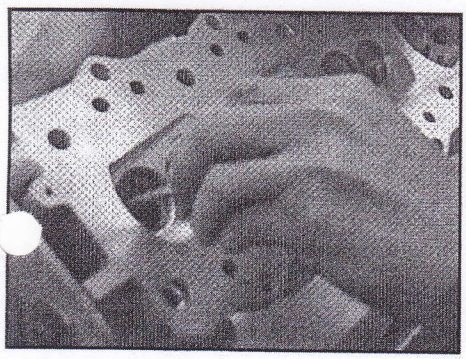

Cylinderhead Build

Then place all valves in situ, ensuring all are in the correct order.

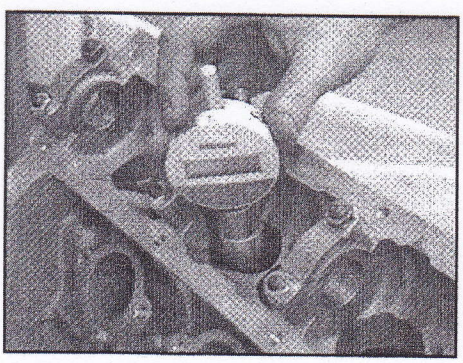

Cylinderhead Build

(STEP 2)
After zeroing DTI gauge on a known flat surface, measure valve height with a valve in cylinder head, using pre-measured spacer.