


Service / Workshop Manual

Wiring Diagrams

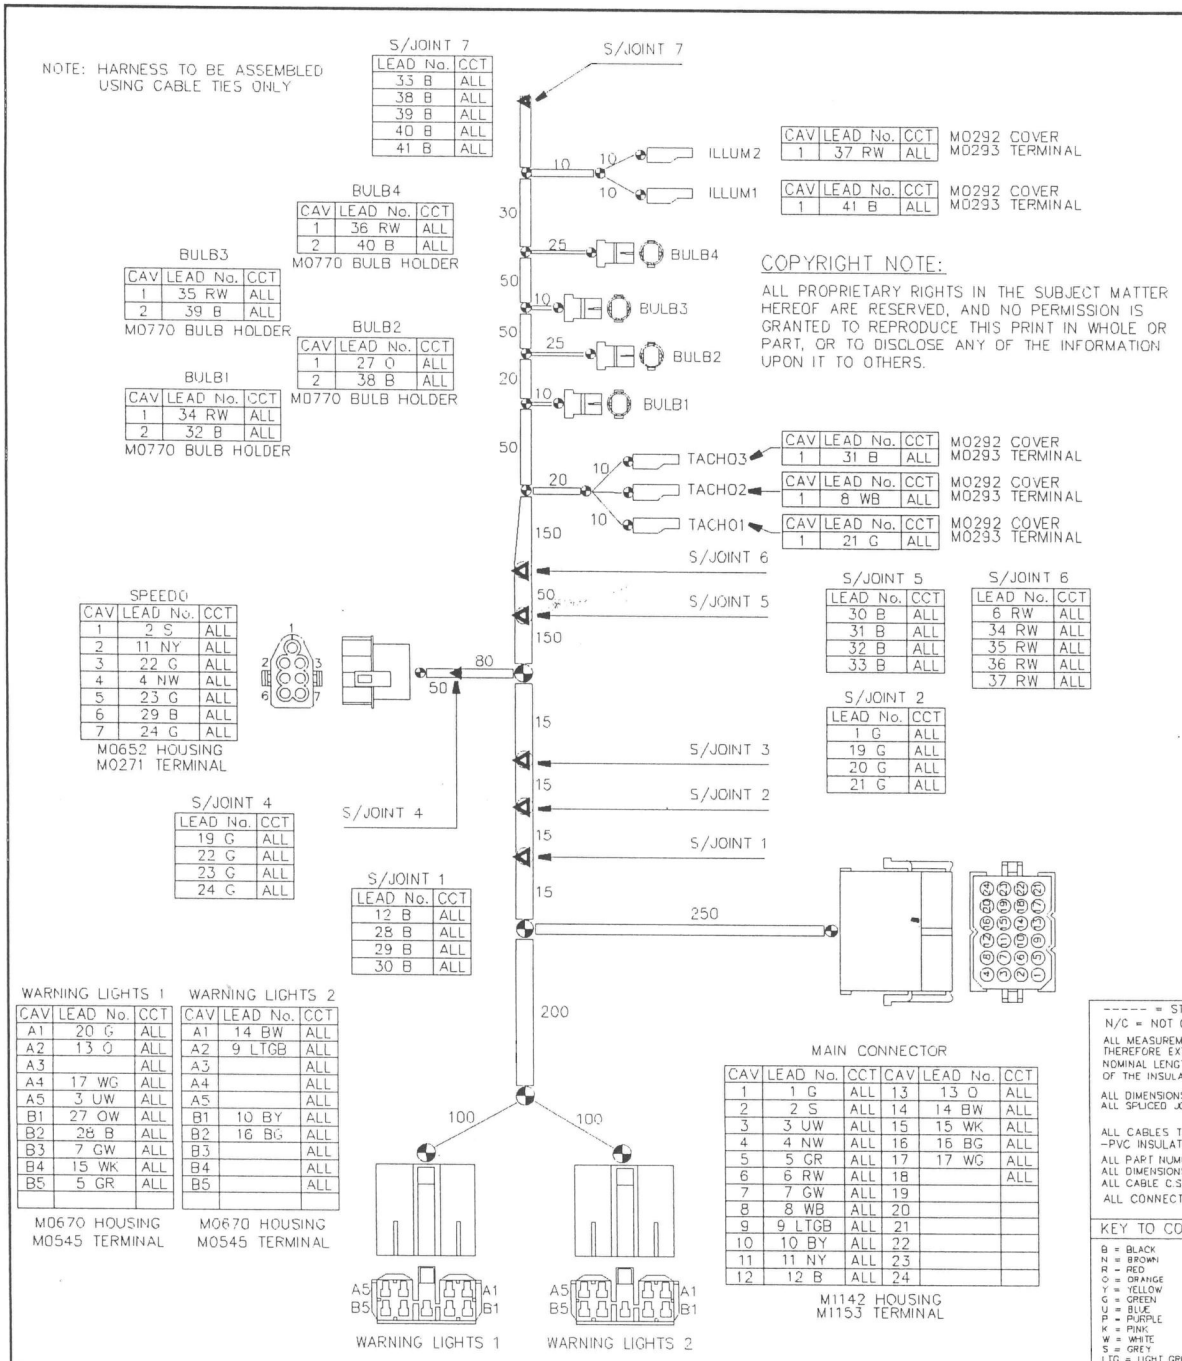

Lead No.	Colour	C.S.A.	Circuit No.	Nominal Length	TERMINATION 1 Service	Loc.	Terminal	TERMINATION 2 Service	Loc.	Terminal
001	G	0.5	ALL	0	MAIN CONNECTOR	A	M1153	S/JOINT 1	A	-----
002	S	0.5	ALL	0	MAIN CONNECTOR	A	M1153	SPEEDO	A	M0271
003	UW	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
004	NW	0.5	ALL	0	MAIN CONNECTOR	A	M1153	SPEEDO	A	M0271
005	GR	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
006	RW	0.5	ALL	0	MAIN CONNECTOR	A	M1153	S/JOINT 6	A	-----
007	GW	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
008	WB	0.5	ALL	0	MAIN CONNECTOR	A	M1153	TACHO 2	A	M0293
009	LTGB	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 2	A	M0545
010	BY	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 2	A	M0545
011	NY	0.5	ALL	0	MAIN CONNECTOR	A	M1153	SPEEDO	A	M0271
012	B	0.5	ALL	0	MAIN CONNECTOR	A	M1153	S/JOINT 1	A	-----
013	O	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
014	BW	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 2	A	M0545
015	WK	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
016	BG	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 2	A	M0545
017	WG	0.5	ALL	0	MAIN CONNECTOR	A	M1153	WARN LIGHTS 1	A	M0545
018		0.5	ALL	0		A			A	
019	G	0.5	ALL	0	S/JOINT 2	A	-----	S/JOINT 4	A	-----
020	G	0.5	ALL	0	S/JOINT 1	A	-----	WARN LIGHTS 1	A	M0545
021	G	0.5	ALL	0	S/JOINT 1	A	-----	TACHO 1	A	M0293
022	G	0.5	ALL	0	S/JOINT 4	A	-----	SPEEDO	A	M0271
023	G	0.5	ALL	0	S/JOINT 4	A	-----	SPEEDO	A	M0271
024	G	0.5	ALL	0	S/JOINT 4	A	-----	SPEEDO	A	M0271
025		0.5	ALL	0		A			A	
026		0.5	ALL	0		A				
027	GW	0.5	ALL	0	WARN LIGHTS 1	A	M0545	BULB2	A	M0771
028	B	0.5	ALL	0	S/JOINT 1	A	-----	WARN LIGHTS 1	A	M0545
029	B	0.5	ALL	0	S/JOINT 1	A	-----	SPEEDO	A	M0271
030	B	0.5	ALL	0	S/JOINT 1	A	-----	S/JOINT 5	A	-----
031	B	0.5	ALL	0	S/JOINT 5	A	-----	TACHO	A	M0293
032	B	0.5	ALL	0	S/JOINT 5	A	-----	BULB 1	A	M0770
033	B	0.5	ALL	0	S/JOINT 5	A	-----	S/JOINT 7	A	-----
034	RW	0.5	ALL	0	S/JOINT 6	A	-----	BULB1	A	M0770
035	RW	0.5	ALL	0	S/JOINT 6	A	-----	BULB3	A	M0770
036	RW	0.5	ALL	0	S/JOINT 6	A	-----	BULB4	A	M0771
037	RW	0.5	ALL	0	S/JOINT 6	A	-----	ILLUM2	A	M0293
038	B	0.5	ALL	0	S/JOINT 7	A	-----	BULB2	A	M0771
039	B	0.5	ALL	0	S/JOINT 7	A	-----	BULB3	A	M0770
040	B	0.5	ALL	0	S/JOINT 7	A	-----	BULB4	A	M0771
041	B	0.5	ALL	0	S/JOINT 7	A	-----	ILLUM1	A	M0293

----- = STRIPPED END APPROX. 20mm LONG
N/C = NOT CONNECTED

ALL MEASUREMENTS ARE TAKEN TO THE CABLE ENTRY FACE OF THE CONNECTOR THEREFORE EXTRA LENGTH SHOULD BE GIVEN ON TOP OF THE NOMINAL LENGTH TO ALLOW FOR THE DEPTH OF THE CONNECTOR AND STRIPPING OF THE INSULATION FOR TERMINATION

ALL DIMENSIONS ARE GIVEN TO LOCATE SPLICES
ALL SPLICED JOINTS TO BE FINISHED WITH HHEATSHRINK

ALL CABLES TO BE OF THE THIN WALL INSULATION TYPE -PVC INSULATION RATED 105° C
ALL PART NUMBERS QUOTED ARE TVR PART NUMBERS
ALL DIMENSIONS ARE GIVEN TO CENTRES OF JUNCTIONS
ALL CABLE C.S.A.'s (cross sectional area's) ARE GIVEN IN $M.M._2$
ALL CONNECTORS ARE DRAWN MATING FACE

KEY TO COLOURS

B = BLACK
N = BROWN
R = RED
O = ORANGE
Y = YELLOW
G = GREEN
U = BLUE
P = PURPLE
K = PINK
W = WHITE
S = GREY
LTG = LIGHT GREEN

KEY TO SYMBOLS

JUNCTION
SPLICED JOINT

DO NOT SCALE | IF IN DOUBT ASK

This is a CAD produced drawing. All alterations must be carried out on the system NOT MANUALLY

3rd ANGLE PROJECTION


ALL DIMENSIONS IN MM

DRAWN: P.HARROP DATE: 27/06/97
CHECKED: DATE:
MATERIAL:
TREATMENT:
FINISH:
TOLERANCE: LINEAR ± mm UNLESS
ANGULAR ± 5 degrees STATED
SCALE: 1:1 SHEET SIZE: A2 (594x420)

DESCRIPTION:
CERBERA DASH HARNESS
REVISION 3 - ITT CANNON

© TVR Engineering Limited
TVR Engineering Limited
Bristol Avenue, Blackpool,
Lancashire, Fy2 0JF
TEL 01253 509000
FAX 01253 357105

QUANTITY PER CAR: 1 off
PART NO: (SUPPLIERS REF)
SHEET NO: 1 of 1
DRAWING NO: (INTERNAL USE) CERB3006

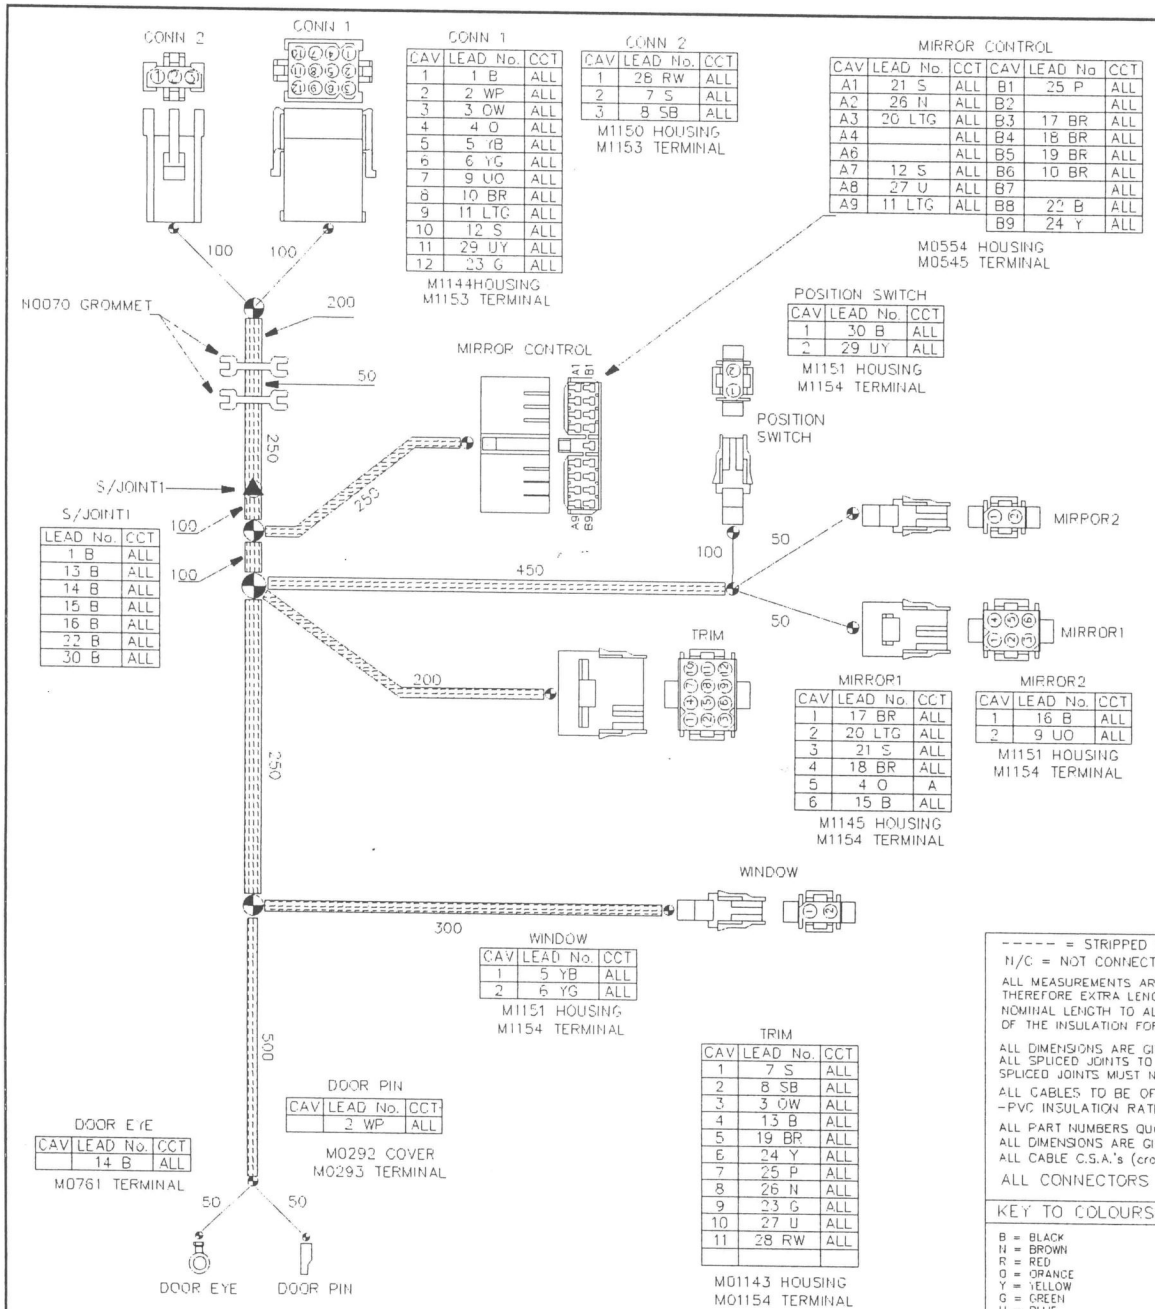

CONN 1

CAV	LEAD No.	CCT
1	1 B	ALL
2	2 WP	ALL
3	3 OW	ALL
4	4 O	ALL
5	5 YB	ALL
6	6 YG	ALL
7	9 UO	ALL
8	10 BR	ALL
9	11 LTG	ALL
10	12 S	ALL
11	29 UY	ALL
12	23 G	ALL

M1144HOUSING
M1153 TERMINAL

CONN 2

CAV	LEAD No.	CCT
1	28 RW	ALL
2	7 S	ALL
3	8 SB	ALL

M1150 HOUSING
M1153 TERMINAL

MIRROR CONTROL

CAV	LEAD No.	CCT	CAV	LEAD No	CCT
A1	21 S	ALL	B1	25 P	ALL
A2	26 N	ALL	B2		ALL
A3	20 LTG	ALL	B3	17 BR	ALL
A4		ALL	B4	18 BR	ALL
A6		ALL	B5	19 BR	ALL
A7	12 S	ALL	B6	10 BR	ALL
A8	27 U	ALL	B7		ALL
A9	11 LTG	ALL	B8	22 B	ALL
			B9	24 Y	ALL

M0554 HOUSING
M0545 TERMINAL

POSITION SWITCH

CAV	LEAD No.	CCT
1	30 B	ALL
2	29 UY	ALL

M1151 HOUSING
M1154 TERMINAL

S/JOINT1

LEAD No.	CCT
1 B	ALL
13 B	ALL
14 B	ALL
15 B	ALL
16 B	ALL
22 B	ALL
30 B	ALL

MIRROR1

CAV	LEAD No.	CCT
1	17 BR	ALL
2	20 LTG	ALL
3	21 S	ALL
4	18 BR	ALL
5	4 O	A
6	15 B	ALL

M1145 HOUSING
M1154 TERMINAL

MIRROR2

CAV	LEAD No.	CCT
1	16 B	ALL
2	9 UO	ALL

M1151 HOUSING
M1154 TERMINAL

WINDOW

CAV	LEAD No.	CCT
1	5 YB	ALL
2	6 YG	ALL

M1151 HOUSING
M1154 TERMINAL

TRIM

CAV	LEAD No.	CCT
1	7 S	ALL
2	8 SB	ALL
3	3 OW	ALL
4	13 B	ALL
5	19 BR	ALL
6	24 Y	ALL
7	25 P	ALL
8	26 N	ALL
9	23 G	ALL
10	27 U	ALL
11	28 RW	ALL

M01143 HOUSING
M01154 TERMINAL

DOOR PIN

CAV	LEAD No.	CCT
	2 WP	ALL

M0292 COVER
M0293 TERMINAL

DOOR EYE

CAV	LEAD No.	CCT
	14 B	ALL

M0761 TERMINAL

Lead No.	Colour	C.S.A.	Circuit No.	Nominal Length	TERMINATION 1			TERMINATION 2		
					Service	Loc.	Terminal	Service	Loc.	Terminal
001	B	1.0	ALL	0	CONN 1		M1153	S/JOINT1		-----
002	WP	0.5	ALL	0	CONN 1		M1153	DOOR PIN		M0292
003	OW	0.5	ALL	0	CONN 1		M1153	TRIM		M1154
004	O	0.5	ALL	0	CONN 1		M1153	MIRROR2		M1154
005	YB	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
006	YG	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
007	S	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
008	SB	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
009	UO	0.5	ALL	0	CONN 1		M1153	MIRROR2		M1154
010	BR	0.5	ALL	0	CONN 1		M1153	MIRROR CONTROL		M0545
011	LTG	0.5	ALL	0	CONN 1		M1153	MIRROR CONTROL		M0545
012	S	0.5	ALL	0	CONN 1		M1153	MIRROR CONTROL		M0545
013	B	0.5	ALL	0	S/JOINT1		-----	TRIM		M1154
014	B	0.5	ALL	0	S/JOINT1		-----	DOOR EYE		M0761
015	B	0.5	ALL	0	S/JOINT1		-----	MIRROR 1		M1154
016	B	0.5	ALL	0	S/JOINT1		-----	MIRROR2		M1154
017	BR	0.5	ALL	0	MIRROR CONTROL		M0545	MIRROR1		M1154
018	BR	0.5	ALL	0	MIRROR CONTROL		M0545	MIRROR1		M1154
019	BR	0.5	ALL	0	MIRROR CONTROL		M0545	TRIM		M1154
020	LTG	0.5	ALL	0	MIRROR1		M0530	MIRROR CONTROL		M0545
021	S	0.5	ALL	0	MIRROR1		M0530	MIRROR CONTROL		M0545
022	B	0.5	ALL	0	MIRROR CONTROL		M0545	S/JOINT1		-----
023	G	0.5	ALL	0	CONN 1		M1153	TRIM		M1154
024	Y	0.5	ALL	0	TRIM		M1154	MIRROR CONTROL		M0545
025	P	0.5	ALL	0	TRIM		M1154	MIRROR CONTROL		M0545
026	N	0.5	ALL	0	TRIM		M1154	MIRROR CONTROL		M0545
027	U	0.5	ALL	0	TRIM		M1154	MIRROR CONTROL		M0545
028	RW	0.5	ALL	0	CONN 2		M1153	TRIM		M1154
029	UY	0.5	ALL	0	CONN 1		M1153	POSITION SWITCH		M1154
030	B	0.5	ALL	0	S/JOINT1		-----	POSITION SWITCH		M1154

COPYRIGHT NOTE:

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR PART, OR TO DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS.

----- = STRIPPED END APPROX. 20mm LONG
N/C = NOT CONNECTED

ALL MEASUREMENTS ARE TAKEN TO THE CABLE ENTRY FACE OF THE CONNECTOR THEREFORE EXTRA LENGTH SHOULD BE GIVEN ON TOP OF THE NOMINAL LENGTH TO ALLOW FOR THE DEPTH OF THE CONNECTOR AND STRIPPING OF THE INSULATION FOR TERMINATION

ALL DIMENSIONS ARE GIVEN TO LOCATE SPLICES
ALL SPLICED JOINTS TO BE IN-LINE AND FINISHED WITH HEATSHRINK
SPLICED JOINTS MUST NOT BREAK THROUGH OUTER HARNESS COVERING

ALL CABLES TO BE OF THE THIN WALL INSULATION TYPE
-PVC INSULATION RATED 105° C

ALL PART NUMBERS QUOTED ARE TVR PART NUMBERS
ALL DIMENSIONS ARE GIVEN TO CENTRES OF JUNCTIONS
ALL CABLE C.S.A.'s (cross sectional area's) ARE GIVEN IN M.M.²

ALL CONNECTORS ARE DRAWN MATING FACE

KEY TO COLOURS

B = BLACK
N = BROWN
R = RED
O = ORANGE
Y = YELLOW
G = GREEN
U = BLUE
P = PURPLE
K = PINK
W = WHITE
S = GREY
LTG = LIGHT GREEN

KEY TO SYMBOLS

JUNCTION
SPLICED JOINT
FLEXIBLE HARNESS COVER
VINYL HARNESS COVER

DO NOT SCALE | IF IN DOUBT ASK

This is a CAD produced drawing. All alterations must be carried out on the system NOT MANUALLY

3rd ANGLE PROJECTION


ALL DIMENSIONS IN MM

DRAWN:	P.HARROP	DATE:	24/06/97
CHECKED:		DATE:	
MATERIAL:			
TREATMENT:			
FINISH:	BRAID		
TOLERANCE:	LINEAR ± 5 mm ANGULAR ± degrees	UNLESS STATED	
SCALE:		SHEET SIZE:	A2 (594x420)

DESCRIPTION:
CERBERA DRIVER'S DOOR HARNESS
REVISION 3 - ITT CANNON

© TVR Engineering Limited
Bristol Avenue, Blackpool,
Lancashire, FY2 0JF
TEL 01253 509000
FAX 01253 357105

QUANTITY PER CAR:	1 off	PART NO (SUPPLIE	
SHEET NO:	1 of 1	DRAWI (INTERN	CERB3002

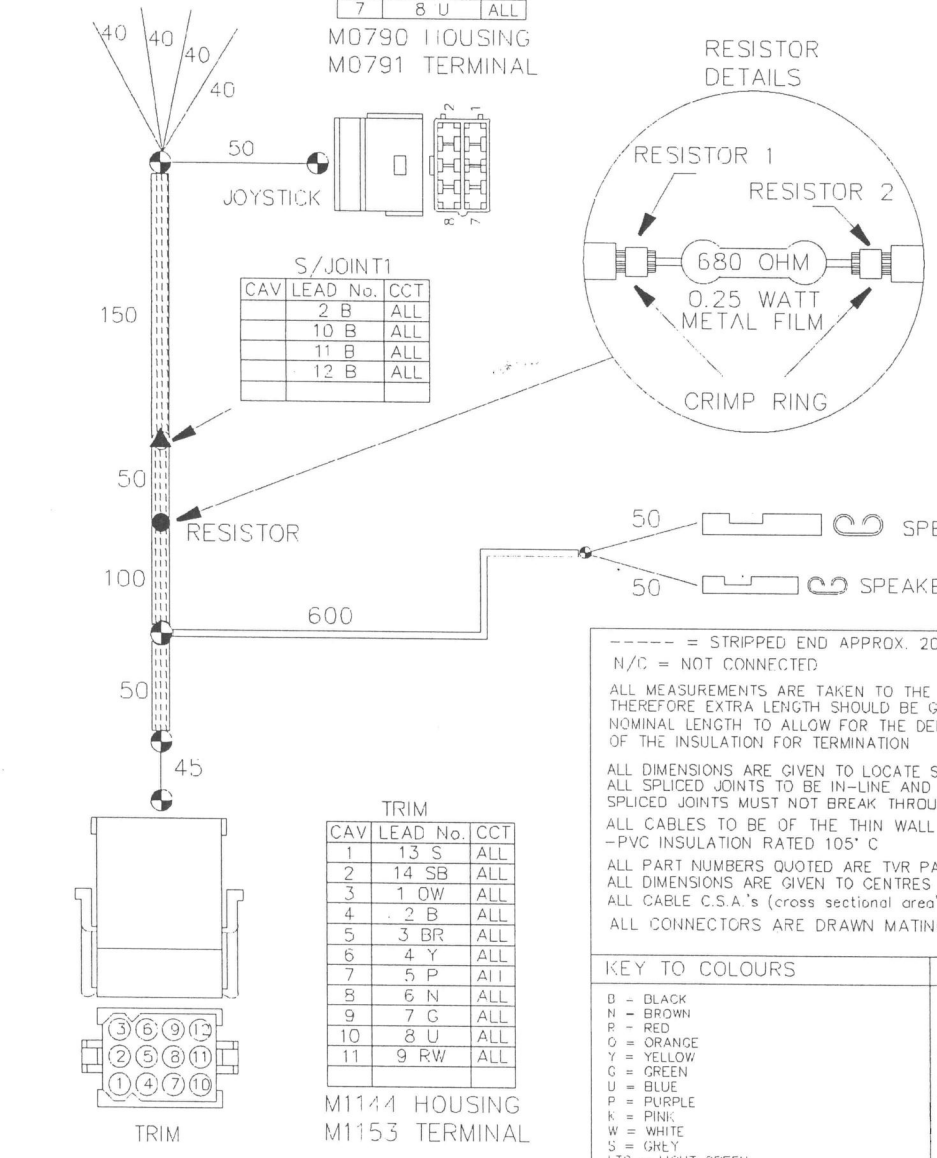

Lead No.	Colour	C.S.A.	Circuit No.	Nominal Length	TERMINATION 1			TERMINATION 2		
					Service	Loc.	Terminal	Service	Loc.	Terminal
001	OW	0.5	ALL	0	TRIM		M1153	TAILS		-----
002	B	0.5	ALL	0	TRIM		M1153	S/JOINT1		-----
003	BR	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
004	Y	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
005	P	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
006	N	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
007	G	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
008	U	0.5	ALL	0	TRIM		M1153	JOYSTICK		M0791
009	RW	0.5	ALL	0	TRIM		M1153	RESISTOR 1		-----
010	B	0.5	ALL	0	S/JOINT1		-----	TAILS		-----
011	B	0.5	ALL	0	S/JOINT1		-----	TAILS		-----
012	B	0.5	ALL	0	S/JOINT1		-----	JOYSTICK		M0791
013	S	0.5	ALL	0	TRIM		M1153	SPEAKER +		4.8 SPADE
014	SB	0.5	ALL	0	TRIM		M1153	SPEAKER –		2.8 SPADE
015	RW	0.5	ALL	0	RESISTOR 2		-----	TAILS		-----

COPYRIGHT NOTE: ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR PART, OR TO DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS.

----- = STRIPPED END APPROX. 20mm LONG
N/C = NOT CONNECTED

ALL MEASUREMENTS ARE TAKEN TO THE CABLE ENTRY FACE OF THE CONNECTOR THEREFORE EXTRA LENGTH SHOULD BE GIVEN ON TOP OF THE NOMINAL LENGTH TO ALLOW FOR THE DEPTH OF THE CONNECTOR AND STRIPPING OF THE INSULATION FOR TERMINATION

ALL DIMENSIONS ARE GIVEN TO LOCATE SPLICES
ALL SPLICED JOINTS TO BE IN-LINE AND FINISHED WITH HEATSHRINK
SPLICED JOINTS MUST NOT BREAK THROUGH OUTER HARNESS COVERING

ALL CABLES TO BE OF THE THIN WALL INSULATION TYPE –PVC INSULATION RATED 105° C

ALL PART NUMBERS QUOTED ARE TVR PART NUMBERS
ALL DIMENSIONS ARE GIVEN TO CENTRES OF JUNCTIONS
ALL CABLE C.S.A.'s (cross sectional area's) ARE GIVEN IN $M.M_2$
ALL CONNECTORS ARE DRAWN MATING FACE

KEY TO COLOURS	KEY TO SYMBOLS
B = BLACK N = BROWN R = RED O = ORANGE Y = YELLOW G = GREEN U = BLUE P = PURPLE K = PINK W = WHITE S = GREY LTG = LIGHT GREEN	JUNCTION SPLICED JOINT FLEXIBLE HARNESS COVER TAPE WRAPPED AREAS

DO NOT SCALE | IF IN DOUBT ASK

This is a CAD produced drawing. All alterations must be carried out on the system NOT MANUALLY


3rd ANGLE PROJECTION
ALL DIMENSIONS IN MM

DRAWN:	P.HARROP	DATE:	26/06/97
CHECKED:		DATE:	
MATERIAL:			
TREATMENT: FINISH:			
TOLERANCE:	LINEAR ± 5 mm ANGULAR ± degrees		UNLESS STATED
SCALE:	1:1 (FULL SIZE)	SHEET SIZE:	A4 (297x210)

DESCRIPTION:
CERBERA DRIVER'S DOOR TRIM HARNESS
REVISION 3 – ITT CANNON + RESISTOR

© TVR Engineering Limited
Bristol Avenue, Blackpool,
Lancashire, FY2 0JF
TEL. 01253 509000
FAX. 01253 357105

QUANTITY PER CAR:	1 off	PART NO: (SUPPLIERS REF)	
SHEET NO:	1 of 1	DRAWING NO: (INTERNAL USE)	CERB3004

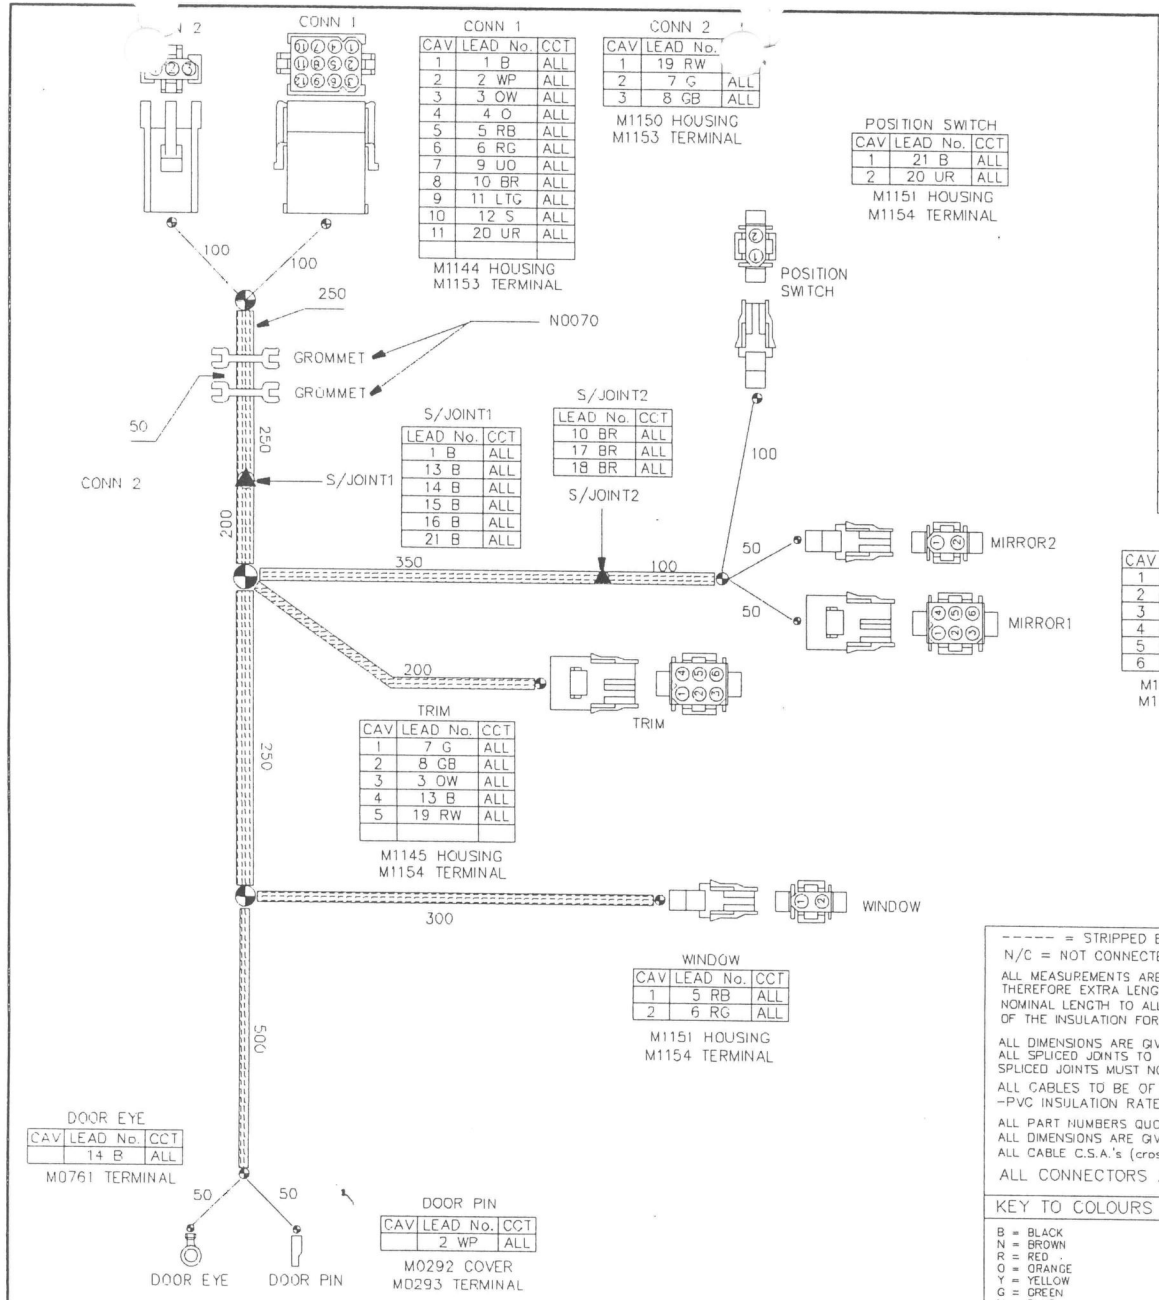

CONN 1

CAV	LEAD No.	CCT
1	1 B	ALL
2	2 WP	ALL
3	3 OW	ALL
4	4 O	ALL
5	5 RB	ALL
6	6 RG	ALL
7	9 UO	ALL
8	10 BR	ALL
9	11 LTG	ALL
10	12 S	ALL
11	20 UR	ALL

M1144 HOUSING
M1153 TERMINAL

CONN 2

CAV	LEAD No.	CCT
1	19 RW	
2	7 G	ALL
3	8 GB	ALL

M1150 HOUSING
M1153 TERMINAL

POSITION SWITCH

CAV	LEAD No.	CCT
1	21 B	ALL
2	20 UR	ALL

M1151 HOUSING
M1154 TERMINAL

S/JOINT1

LEAD No.	CCT
1 B	ALL
13 B	ALL
14 B	ALL
15 B	ALL
16 B	ALL
21 B	ALL

S/JOINT2

LEAD No.	CCT
10 BR	ALL
17 BR	ALL
18 BR	ALL

TRIM

CAV	LEAD No.	CCT
1	7 G	ALL
2	8 GB	ALL
3	3 OW	ALL
4	13 B	ALL
5	19 RW	ALL

M1145 HOUSING
M1154 TERMINAL

WINDOW

CAV	LEAD No.	CCT
1	5 RB	ALL
2	6 RG	ALL

M1151 HOUSING
M1154 TERMINAL

DOOR EYE

CAV	LEAD No.	CCT
	14 B	ALL

M0761 TERMINAL

DOOR PIN

CAV	LEAD No.	CCT
	2 WP	ALL

M0292 COVER
M0293 TERMINAL

MIRROR1

CAV	LEAD No.	CCT
1	17 BR	ALL
2	11 LTG	ALL
3	12 S	ALL
4	18 BR	ALL
5	4 O	ALL
6	15 B	ALL

M1145 HOUSING
M1154 TERMINAL

MIRROR2

CAV	LEAD No.	CCT
1	16 B	ALL
2	9 UO	ALL

M1151 HOUSING
M1154 TERMINAL

Lead No.	Colour	C.S.A.	Circuit No.	Tol.	TERMINATION 1 Service	Loc.	Terminal	TERMINATION 2 Service	Loc.	Terminal
001	B	1.0	ALL	0	CONN 1		M1153	S/JOINT1		-----
002	WP	0.5	ALL	0	CONN 1		M1153	DOOR PIN		M0293
003	OW	0.5	ALL	0	CONN 1		M1153	TRIM		M1154
004	O	0.5	ALL	0	CONN 1		M1153	MIRROR 1		M1154
005	RB	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
006	RG	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
007	G	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
008	GB	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
009	UO	0.5	ALL	0	CONN 1		M1153	MIRROR2		M1154
010	BR	0.5	ALL	0	CONN 1		M1153	S/JOINT2		-----
011	LTG	0.5	ALL	0	CONN 1		M1153	MIRROR1		M1154
012	S	0.5	ALL	0	CONN 1		M1153	MIRROR1		M1154
013	B	0.5	ALL	0	S/JOINT1		-----	TRIM		M1154
014	B	0.5	ALL	0	S/JOINT1		-----	DOOR EYE		M0761
015	B	0.5	ALL	0	S/JOINT1		-----	MIRROR 1		M1154
016	B	0.5	ALL	0	S/JOINT1		-----	MIRROR2		M1154
017	BR	0.5	ALL	0	S/JOINT2		-----	MIRROR1		M1154
018	BR	0.5	ALL	0	S/JOINT2		-----	MIRROR1		M1154
019	RW	0.5	ALL	0	CONN 2		M1153	TRIM		M1154
020	UR	0.5	ALL	0	CONN 1		M1153	POSITION SWITCH		M1154
021	B	0.5	ALL	0	S/JOINT1		-----	POSITION SWITCH		M1154

COPYRIGHT NOTE:

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR PART, OR TO DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS.

----- = STRIPPED END APPROX. 20mm LONG
N/C = NOT CONNECTED

ALL MEASUREMENTS ARE TAKEN TO THE CABLE ENTRY FACE OF THE CONNECTOR THEREFORE EXTRA LENGTH SHOULD BE GIVEN ON TOP OF THE NOMINAL LENGTH TO ALLOW FOR THE DEPTH OF THE CONNECTOR AND STRIPPING OF THE INSULATION FOR TERMINATION

ALL DIMENSIONS ARE GIVEN TO LOCATE SPLICES
ALL SPLICED JOINTS TO BE IN-LINE AND FINISHED WITH HEATSHRINK
SPLICED JOINTS MUST NOT BREAK THROUGH OUTER HARNESS COVERING

ALL CABLES TO BE OF THE THIN WALL INSULATION TYPE -PVC INSULATION RATED 105° C

ALL PART NUMBERS QUOTED ARE TVR PART NUMBERS
ALL DIMENSIONS ARE GIVEN TO CENTRES OF JUNCTIONS
ALL CABLE C.S.A.'s (cross sectional area's) ARE GIVEN IN $M.M_2$

ALL CONNECTORS ARE DRAWN MATING FACE

KEY TO COLOURS

B = BLACK
N = BROWN
R = RED
O = ORANGE
Y = YELLOW
G = GREEN
U = BLUE
P = PURPLE
K = PINK
W = WHITE
S = GREY
LTG = LIGHT GREEN

KEY TO SYMBOLS

JUNCTION
SPLICED JOINT
FLEXIBLE HARNESS COVER
VINYL HARNESS COVER

DO NOT SCALE | IF IN DOUBT ASK

This is a CAD produced drawing. All alterations must be carried out on the system NOT MANUALLY

3rd ANGLE PROJECTION


ALL DIMENSIONS IN MM

DRAWN:	P.HARROP	DATE:	24/06/97
CHECKED:		DATE:	
MATERIAL:			
TREATMENT:			
FINISH:	BRAID		
TOLERANCE:	LINEAR ± 5 mm ANGULAR ± degrees		UNLESS STATED
SCALE:		SHEET SIZE:	A2 (594x420)

DESCRIPTION:
CERBERA PASSENGER'S DOOR HARNESS
REVISION 3 – ITT CANNON

© TVR Engineering Limited
Bristol Avenue, Blackpool,
Lancashire, FY2 0JF
TEL. 01253 509000
FAX. 01253 357105

QUANTITY PER CAR:	1 off	PART NO: (SUPPLIERS REF)	
SHEET NO:	1 of 1	DRAWING NO: (INTERNAL USE)	CERB3003

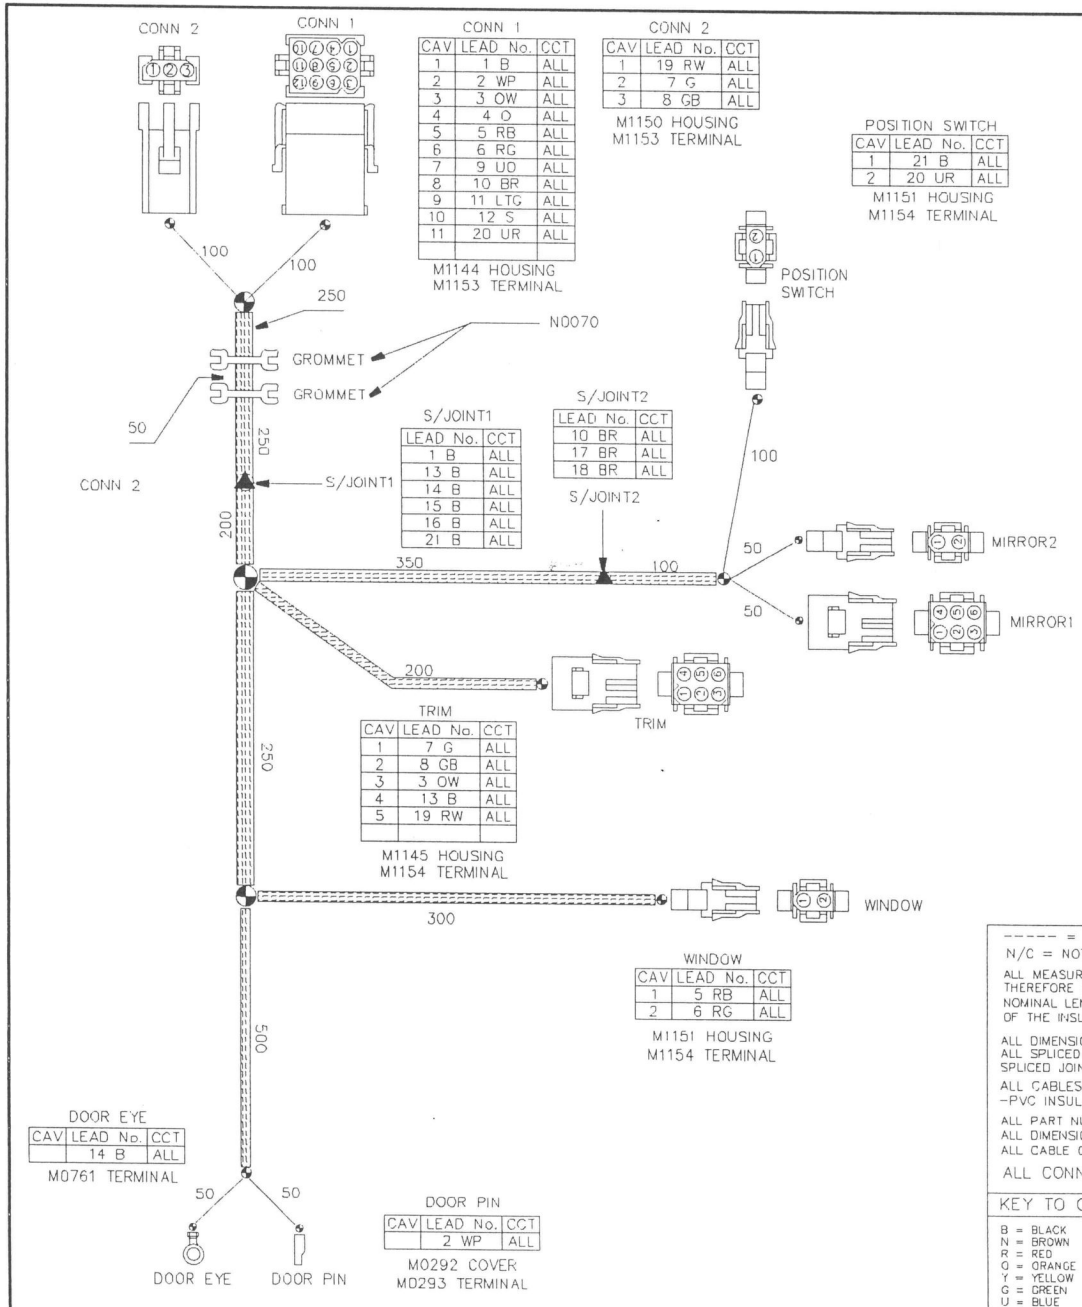

CONN 1		
CAV	LEAD No.	CCT
1	1 B	ALL
2	2 WP	ALL
3	3 OW	ALL
4	4 O	ALL
5	5 RB	ALL
6	6 RG	ALL
7	9 UO	ALL
8	10 BR	ALL
9	11 LTG	ALL
10	12 S	ALL
11	20 UR	ALL

M1144 HOUSING
M1153 TERMINAL

CONN 2		
CAV	LEAD No.	CCT
1	19 RW	ALL
2	7 G	ALL
3	8 GB	ALL

M1150 HOUSING
M1153 TERMINAL

POSITION SWITCH		
CAV	LEAD No.	CCT
1	21 B	ALL
2	20 UR	ALL

M1151 HOUSING
M1154 TERMINAL

S/JOINT1	
LEAD No.	CCT
1 B	ALL
13 B	ALL
14 B	ALL
15 B	ALL
16 B	ALL
21 B	ALL

S/JOINT2	
LEAD No.	CCT
10 BR	ALL
17 BR	ALL
18 BR	ALL

MIRROR1		
CAV	LEAD No.	CCT
1	17 BR	ALL
2	11 LTG	ALL
3	12 S	ALL
4	18 BR	ALL
5	4 O	ALL
6	15 B	ALL

M1145 HOUSING
M1154 TERMINAL

MIRROR2		
CAV	LEAD No.	CCT
1	16 B	ALL
2	9 UO	ALL

M1151 HOUSING
M1154 TERMINAL

TRIM		
CAV	LEAD No.	CCT
1	7 G	ALL
2	8 GB	ALL
3	3 OW	ALL
4	13 B	ALL
5	19 RW	ALL

M1145 HOUSING
M1154 TERMINAL

WINDOW		
CAV	LEAD No.	CCT
1	5 RB	ALL
2	6 RG	ALL

M1151 HOUSING
M1154 TERMINAL

DOOR EYE		
CAV	LEAD No.	CCT
	14 B	ALL

M0761 TERMINAL

DOOR PIN		
CAV	LEAD No.	CCT
	2 WP	ALL

M0292 COVER
M0293 TERMINAL

Lead No.	Colour	C.S.A.	Circuit No.	Nominal Length	TERMINATION 1			TERMINATION 2		
					Service	Loc.	Terminal	Service	Loc.	Terminal
001	B	1.0	ALL	0	CONN 1		M1153	S/JOINT1		-----
002	WP	0.5	ALL	0	CONN 1		M1153	DOOR PIN		M0293
003	OW	0.5	ALL	0	CONN 1		M1153	TRIM		M1154
004	O	0.5	ALL	0	CONN 1		M1153	MIRROR 1		M1154
005	RB	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
006	RG	1.5	ALL	0	CONN 1		M1153	WINDOW		M1154
007	G	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
008	GB	SPK	ALL	0	CONN 2		M1153	TRIM		M1154
009	UO	0.5	ALL	0	CONN 1		M1153	MIRROR2		M1154
010	BR	0.5	ALL	0	CONN 1		M1153	S/JOINT2		-----
011	LTG	0.5	ALL	0	CONN 1		M1153	MIRROR1		M1154
012	S	0.5	ALL	0	CONN 1		M1153	MIRROR1		M1154
013	B	0.5	ALL	0	S/JOINT1		-----	TRIM		M1154
014	B	0.5	ALL	0	S/JOINT1		-----	DOOR EYE		M0761
015	B	0.5	ALL	0	S/JOINT1		-----	MIRROR 1		M1154
016	B	0.5	ALL	0	S/JOINT1		-----	MIRROR2		M1154
017	BR	0.5	ALL	0	S/JOINT2		-----	MIRROR1		M1154
018	BR	0.5	ALL	0	S/JOINT2		-----	MIRROR1		M1154
019	RW	0.5	ALL	0	CONN 2		M1153	TRIM		M1154
020	UR	0.5	ALL	0	CONN 1		M1153	POSITION SWITCH		M1154
021	B	0.5	ALL	0	S/JOINT1		-----	POSITION SWITCH		M1154

COPYRIGHT NOTE:

ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HEREOF ARE RESERVED, AND NO PERMISSION IS GRANTED TO REPRODUCE THIS PRINT IN WHOLE OR PART, OR TO DISCLOSE ANY OF THE INFORMATION UPON IT TO OTHERS.

----- = STRIPPED END APPROX. 20mm LONG
N/C = NOT CONNECTED

ALL MEASUREMENTS ARE TAKEN TO THE CABLE ENTRY FACE OF THE CONNECTOR THEREFORE EXTRA LENGTH SHOULD BE GIVEN ON TOP OF THE NOMINAL LENGTH TO ALLOW FOR THE DEPTH OF THE CONNECTOR AND STRIPPING OF THE INSULATION FOR TERMINATION

ALL DIMENSIONS ARE GIVEN TO LOCATE SPLICES
ALL SPLICED JOINTS TO BE IN-LINE AND FINISHED WITH HEATSHRINK
SPLICED JOINTS MUST NOT BREAK THROUGH OUTER HARNESS COVERING

ALL CABLES TO BE OF THE THIN WALL INSULATION TYPE -PVC INSULATION RATED 105° C

ALL PART NUMBERS QUOTED ARE TVR PART NUMBERS
ALL DIMENSIONS ARE GIVEN TO CENTRES OF JUNCTIONS
ALL CABLE C.S.A.'s (cross sectional area's) ARE GIVEN IN M.M.$_2$

ALL CONNECTORS ARE DRAWN MATING FACE

KEY TO COLOURS

B = BLACK
N = BROWN
R = RED
O = ORANGE
Y = YELLOW
G = GREEN
U = BLUE
P = PURPLE
K = PINK
W = WHITE
S = GREY
LTG = LIGHT GREEN

KEY TO SYMBOLS

JUNCTION
SPLICED JOINT
FLEXIBLE HARNESS COVER
VINYL HARNESS COVER

DO NOT SCALE | IF IN DOUBT ASK

This is a CAD produced drawing. All alterations must be carried out on the system NOT MANUALLY

3rd ANGLE PROJECTION
ALL DIMENSIONS IN MM

DRAWN:	P.HARROP	DATE:	24/06/97
CHECKED:		DATE:	
MATERIAL:			
TREATMENT:			
FINISH:	BRAID		
TOLERANCE:	LINEAR ± 5 mm ANGULAR ± degrees	UNLESS STATED	
SCALE:		SHEET SIZE:	A2 (594x420)

DESCRIPTION:
CERBERA PASSENGER'S DOOR HARNESS
REVISION 3 – ITT CANNON

© TVR Engineering Limited
Bristol Avenue, Blackpool,
Lancashire, FY2 0JF
TEL. 01253 509000
FAX. 01253 357105

QUANTITY PER CAR:	1 off	PART NO: (SUPPLIERS REF)	
SHEET NO:	1 of 1	DRAWING NO: (INTERNAL USE)	CERB3003